

CERAMAGUARD (100% RH)

CI/SfB (35) Xy 08/2010



www.armstrong.eu





Recycled Content



Light Reflectance



Intelligibility

CERAMAGUARD

BOARD



Prelude XL² / TLX / Corrosive Resistant 24 mm / Clean Room Grid 24 mm



600 x 600 x 15 mm
600 x 1200 x 15 mm


607 M
608 M



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.55(MH)	0.60	0.25	0.30	0.50	0.80	0.85	0.75	α_p

Sound Absorption Class = D

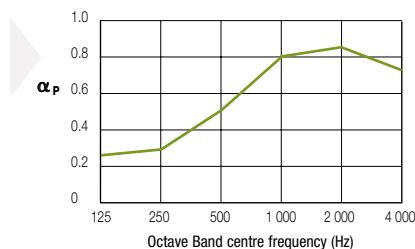

EN 20140-9
& EN 717-1

Dncw
39 dB



EN 13501-1

EEA Euroclass A1

RUS NG to FZ 123



EN 12667
& ISO 8301

$\lambda = 0.067$ W/m K



100 % RH



≈ 7 kg/m²
20 kg/m² if wet

- Please contact our Internal Technical Sales Group for further details.
- Pour de plus amples informations merci de contacter notre Service Information Plafonds.
- Weitere Informationen erhalten Sie von unserem Kundenservice. Änderungen vorbehalten.
- Voor meer informatie kunt u contact opnemen met Market Service Center.
- Per ulteriori dettagli consultare il nostro Ufficio Commerciale.
- Para más detalles, por favor, contacte con el Servicio de Información de Techos.
- W razie dodatkowych pytań prosimy kontaktować się z biurem Armstrong w Warszawie.
- За более подробной информацией обращайтесь пожалуйста в представительство компании Армстронг.

www.armstrong.eu

Armstrong®