

BIOGUARD ACOUSTIC (ISO 5)

BIOGUARD ACOUSTIC (ISO 5)



45%
EN ISO
14021

Recycled Content



85%
EN ISO
7742-2 & 3

Light Reflectance


BIOGUARD	BOARD	TEGULAR	MICROLOOK
	 Prelude XL ² /TLX / CR 24 mm Clean Room Grid 24 mm	 Prelude XL ² /TLX 24 mm Clean Room Grid 24 mm	 Prelude XL ² /TL 15 mm Interlude XL ² 15 mm
600 x 600 x 17 mm	2703 M	2551 M	2552 M
625 x 625 x 17 mm	2703 D	2551 D	2552 D
600 x 1200 x 17 mm	2704 M		



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.60(H)	0.60	0.35	0.40	0.50	0.70	0.85	0.90	α_p

Sound Absorption Class = C

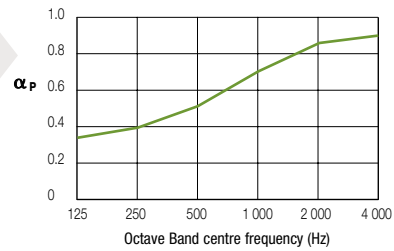

EN ISO 10848-2
/ EN 20140-9
& EN ISO 717-1

D_{nfw}	36 dB
------------------------	--------------



EN ISO 140-3
& EN ISO 717-1

R_w	18 dB
----------------------	--------------



EN 13501-1

EEA Euroclass A2-s1, d0

RUS KM1 (G1, V1, D1, T1) FZ 123



EN 12667
& ISO 8301

$\lambda = 0.06$ W/m K



ISO 14644-1

ISO 5



95 % RH

15YEAR
guarantee



3.8 kg/m²

Please contact our Armstrong Technical Sales Group for further details.

www.armstrong.eu

Armstrong®