

SAHARA UNPERFORATED

CI/SfB (35) Xy
03/2011



www.armstrong.eu



SAHARA UNPERFORATED



Recycled Content

Light Reflectance

Intelligibility


SAHARA UNPERFORATED	BOARD	TEGULAR	MICROLOOK
	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TL 15 mm Interlude XL ² 15 mm
600 x 600 x 15 mm 625 x 625 x 15 mm	2610 M 2610 D	2612 M	2613 M



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.10(L)	0.15	0.30	0.20	0.10	0.10	0.10	0.20	α_p

Sound Absorption Class = not classified

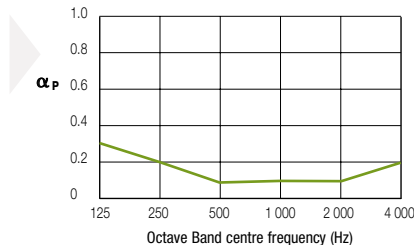

EN ISO 10848-2
/ EN 2014069
& EN ISO 717-1

Dncw
34 dB



EN ISO 140-3
& EN ISO 717-1

Rw
17 dB



EN 13501-1

EEA Euroclass A2-s1, d0



EN 12667
& ISO 8301

$\lambda = 0.06 \text{ W/m K}$



95 % RH

15 YEAR
guarantee



3.9 kg/m²

- Please contact our Armstrong Technical Sales group for further details.
- Pour de plus amples informations merci de contacter notre Service Information Plafonds.
- Weitere Informationen erhalten Sie von unserem Kundenservice. Änderungen vorbehalten.
- Voor meer informatie kunt u contact opnemen met Market Service Center.
- Per ulteriori dettagli consultare il nostro Ufficio Commerciale.
- Para más detalles, por favor, contacte con el Servicio de Información de Techos.
- W razie dodatkowych pytań prosimy kontaktować się z biurem Armstrong w Warszawie.

www.armstrong.eu

Armstrong®